



A RUTHMAN COMPANY


# 7800 Series Horizontal Pumps

11032-JP

1750 RPM

Gusher 7800 Series Horizontal pumps provide years of trouble-free, low maintenance operation. If service is needed beyond standard periodic lubrication, the back pullout design cuts downtime to a minimum.

With the back pullout design, all pump components are removed and reinstalled without disconnecting the piping. After completing repairs (typically replacement of the seal assembly or shaft sleeve) the pump is quickly returned to operation.

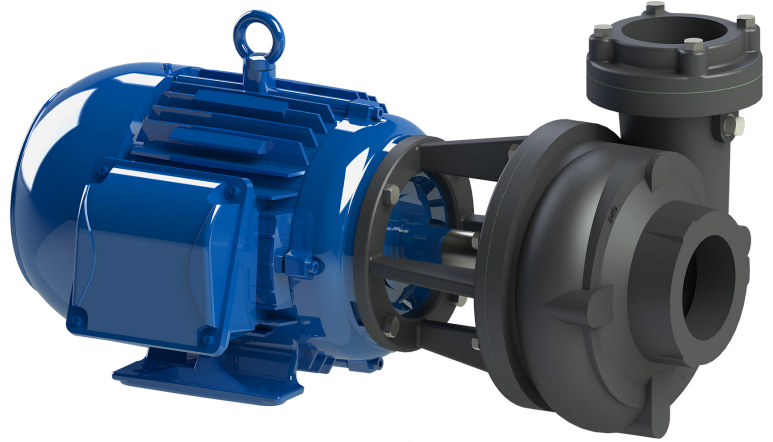

## Key Specifications

**Type:** Centrifugal, End Suction

**Flow:** Up to 180 gpm

**Head:** Up to 48' TDH

**Liquid Temp:** Max 180° F

**Max Solid Size:** .68"

**Motor Type:** Standard JP Motor

**Intake:** 3"

**Discharge:** 3"


**Power:** 1 hp, 1.5 hp, 2 hp, 3 hp and 5 hp

## Features

- Back pullout design reduces service downtime
- Durable one-piece shaft eliminates risk of coupling misalignment
- Renewable shaft sleeve protects shaft from wear
- Mechanical seal prevents leakage
- Enclosed impeller for maximum efficiency

## Options

- Cast Iron or 316 Stainless Steel construction
- Choice of 1 or 3 phase motor
- Multiple mechanical seal materials
- Impeller variations: 316 Stainless Steel
- Seal flush line addition
- Long coupled design (CBM model pumps)

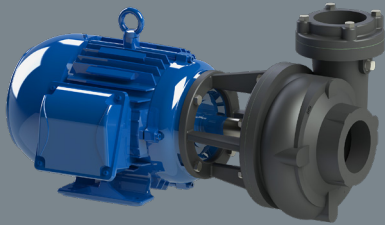

## Low Maintenance

- Long service life
- Back pullout design
- Renewable shaft sleeve

## Custom Design

- Choice of materials
- Choice of seals
- Choice of impellers

## Applications

- Machine tool coolant systems
- Cooling towers and chillers
- Industrial spray washers
- Industrial washing machines
- Paint/Ecoat paint systems
- Paper pulp
- Wastewater
- Water purification




A RUTHMAN COMPANY

www.Gusher.com  
Info@Gusher.com  
859.824.5001

## Performance Curves


1750 RPM

Recommended Operating Range

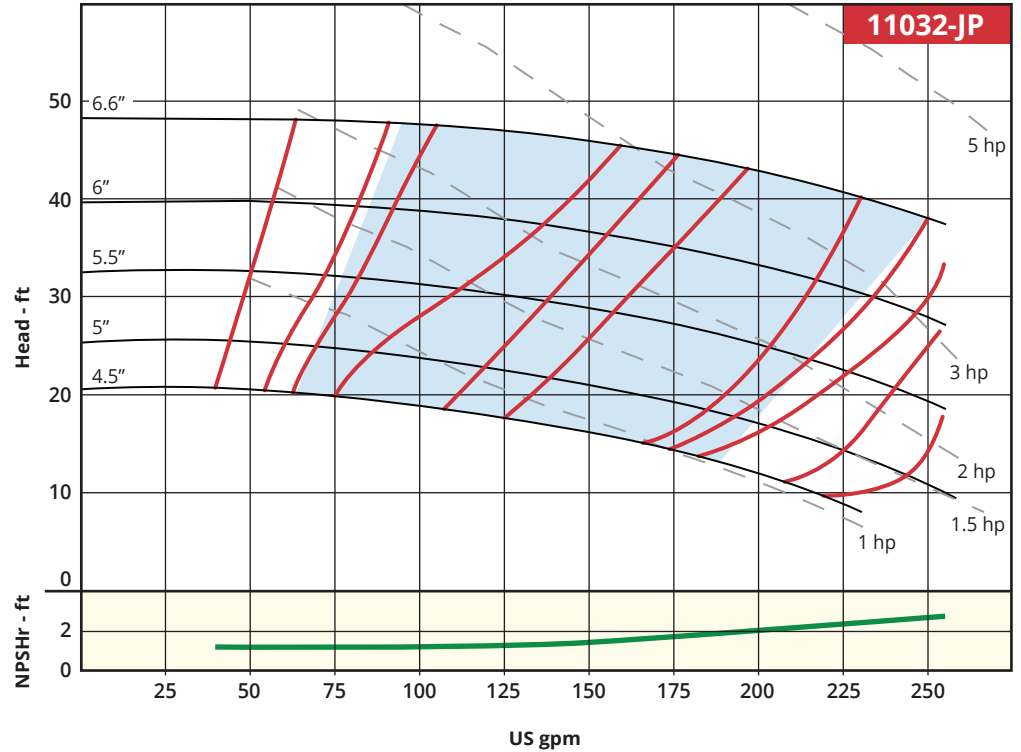

11032-JP are available in 1 hp, 1.5 hp, 2 hp, 3 hp and 5 hp models.

## Dimensions\*

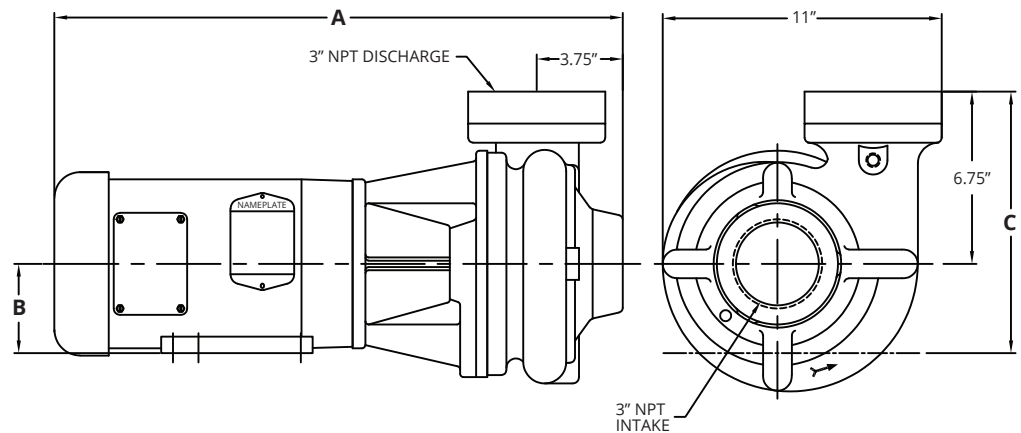

HP	Total Length (A)	Motor Center to Foot (B)	Total Height (C)	Weight (lbs)
1	23.75"	3.50"	10.25"	100
1.5	24.50"	3.50"	10.25"	110
2	24.50"	3.50"	10.25"	110
3	23.00"	4.50"	11.25"	140
5	24.44"	4.50"	11.25"	180

\*For reference only; not for construction. Contact Gusher Engineering for certified drawings.